



POWERING **PROFESSIONALS**®



**NEW PRODUCTS RELEASE**

**CATALOGUE**

**MARCH 2026**

**VISIT US ONLINE**



www.itmtools.com.au

### DISTRIBUTOR PORTAL

- Order online
- Track and trace orders
- Wholesale and bulk buy pricing
- Stock on hand at all warehouses
- Out of stock due dates
- Download invoices

### PRODUCT PAGES

- Product features and specifications
- Demonstration videos
- Product brochures and catalogues
- Product MSDS and user manuals
- Latest blogs and customer testimonials

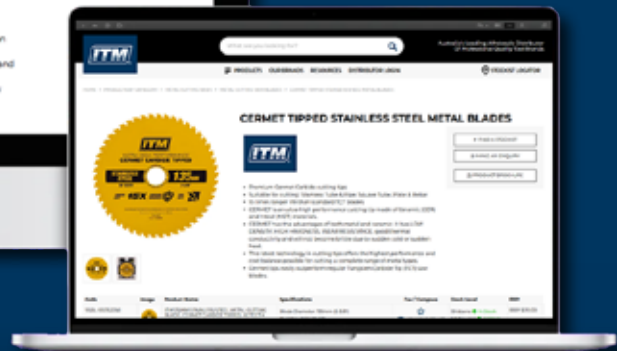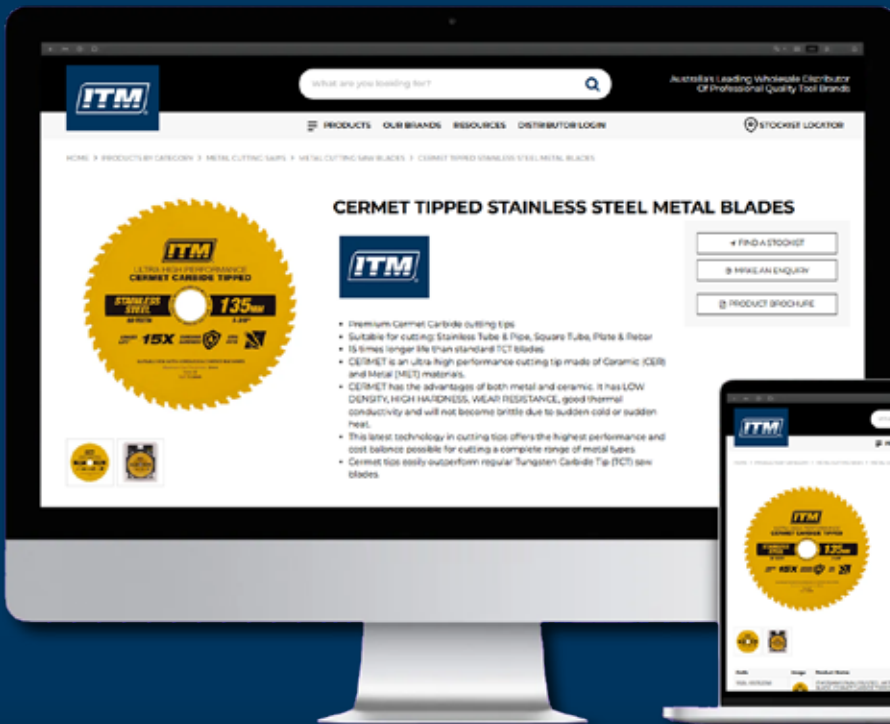



### CERMET TIPPED STAINLESS STEEL METAL BLADES

- Premium Cermet Carbide cutting tips
- Suitable for cutting stainless steel up to 3mm thick including Stainless Tube & Pipe, Square Tube, Plate & Rebar
- 15 times longer life than standard TCT blades



### STAINLESS STEEL

PART NO.	SIZE	TEETH	BORE
SSBL-SS1352050	135mm	50	20mm
SSBL-SS1502052	150mm	52	20mm
SSBL-SS1652056	165mm	56	20mm
SSBL-SS1852064	185mm	64	20mm
SSBL-SS2031670	203mm	70	16mm
SSBL-SS3052596	305mm	96	25.4mm
SSBL350-CERMET110	355mm	110	25.4mm



### CARBIDE TIPPED SHEET METAL BLADES

- Premium Cermet Carbide cutting tips for sizes 135mm and 150mm
- C6 Carbide tips for sizes 165mm and 185mm, giving optimal performance for the blade size
- Suitable for cutting sheet metal up to 1.2mm thick including Flat Sheet, Corrugated Sheet, Roofing Steels & Cladding
- 6 times longer life than standard TCT blades



### SHEET METAL

PART NO.	SIZE	TEETH	BORE
SSBL-SM1352050	135mm	50	20mm
SSBL-SM1502052	150mm	52	20mm
SSBL-SM1652056	165mm	56	20mm
SSBL-SM1852060	185mm	60	20mm



### CERMET TIPPED METAL BLADES

- Premium Cermet Carbide cutting tips
- Suitable for cutting metal up to 6mm thick, including Angle Profile, Plate Steel, Square Tube, Pipe, Rebar & C-Channel Steels
- 3 times longer life than standard TCT blades



### METAL CUTTING

PART NO.	SIZE	TEETH	BORE
SSBL-M1352026	135mm	26	20mm
SSBL-M1502032	150mm	32	20mm
SSBL-M1652032	165mm	32	20mm
SSBL-M1852036	185mm	36	20mm
SSBL-M2031640	203mm	40	16mm
SSBL-M3052554	305mm	54	25.4mm
SSBL350-CERMET64	355mm	64	25.4mm



**8.1KVA DIESEL GENERATOR**

- Max Watts: 6500W
- Rated Watts: 6000W
- THD <5%
- Automatic voltage regulator
- Electric key start
- Worksite Compliant with IP66 outlets and RCD
- 2 x 15a IP66 outlets
- 4 Wheels for easy transportation
- Powerful and reliable diesel engine
- Large 12.5L fuel tank for extended running time



PART NO.	KVA RATING	MAX.WATTS	RATED WATTS
TM524-6500	8.1	6,500W	6,000W



**8.1KVA SILENCED DIESEL GENERATOR**

- Max Watts: 6500W
- Rated Watts: 6000W
- THD <5%
- Automatic voltage regulator
- Electric key start
- Worksite Compliant with IP66 outlets and RCD
- Silenced cabinet significantly reduces running noise
- 2 x 15a IP66 outlets
- 4 Wheels for easy transportation
- Powerful and reliable diesel engine
- Large 30L fuel tank for extended running time



PART NO.	KVA RATING	MAX.WATTS	RATED WATTS
TM524-6500S	8.1	6,500W	6,000W



**10.3KVA SILENCED DIESEL GENERATOR**

- Max Watts: 8300W
- Rated Watts: 7800W
- THD <5%
- Automatic voltage regulator
- Electric key start
- Worksite Compliant with IP66 outlets and RCD
- Silenced cabinet significantly reduces running noise
- 1x15a & 1x32a IP66 outlets
- 4 Wheels for easy transportation
- Powerful and reliable diesel engine
- Large 26L fuel tank for extended running time



PART NO.	KVA RATING	MAX.WATTS	RATED WATTS
TM524-8300S	10.3	8,300W	7,800W



**15KVA SILENCED DIESEL GENERATOR**

- Max Watts: 12000W
- Rated Watts: 11000W
- THD <5%
- Automatic voltage regulator
- Electric key start
- Worksite Compliant with IP66 outlets and RCD
- Silenced cabinet significantly reduces running noise
- 2x15a & 1x32a IP66 outlets
- 4 Wheels for easy transportation
- Powerful and reliable diesel engine
- Large 26L fuel tank for extended running time



PART NO.	KVA RATING	MAX.WATTS	RATED WATTS
TM524-12000S	15	12,000W	11,000W



### 12.5 KVA CONSTRUCTION SERIES PETROL GENERATOR

- Max Watts: 10000W
- Rated Watts: 9000W
- 1 x 15A & 1 x 32A Outlets
- Running time - 50% load: 10 hours
- Engine HP: 18HP
- KVA: 12.5
- Noise @ 7m Full Load: 80dB
- Fuel Tank: 25L
- Starting System: Electric w/ Remote
- Handle & Wheel Kit: Yes
- Frame Dimensions:  
69.5cm Long x 54.5cm  
Wide x 56.5cm High
- Net Weight: 95Kg



PART NO.	KVA RATING	MAX.WATTS	RATED WATTS
TM520-10000	12.5	10,000W	9,000W



### 11000 WATT INVERTER GENERATOR

- Max Watts: 11000W
- Rated Watts: 10000W
- Noise: 65dB ~ 71dB
- Push Button Electric Start
- Outlets: 2 x 15A, 1 x 32A
- USB & USB-C Charging Outlet
- Fuel Tank: 27L
- Running Time 50% Load: 7 hours
- Starting System: Push button electric start with remote control
- Pure Sine-Wave power for sensitive electronic appliances & devices
- Generator Dimensions:  
82cm L x 63cm W x 73.2cm H
- Generator Weight: 110kg



PART NO.	MAX.WATTS	RATED WATTS
TM523-11000	11,000W	10,000W



### 500KG PREMIUM 4-WAY TRANSMISSION JACK

- Heavy duty construction
- 2 Way tilt cradle
- Load control chains hold the transmission in place
- Adjustable lifting platform for quick adjustment to suit most pan configurations
- Hydraulic foot pedal lift
- 4 Swivel castors for easy positioning
- Net Weight: 52kg



PART NO.	WORKING LOAD LIMIT	HEIGHT LOWERED	HEIGHT RAISED
TM834-00500	500kg	860mm	1840mm



### 5000PSI, 24HP PETROL PRESSURE WASHER

- Genuine Honda GX690 V-Twin Engine
- Max Pressure: 5000PSI
- Flow Rate: 25 L/min
- Large 15.2L fuel tank
- Electric Start
- Industrial triplex pump with ceramic coated stainless steel pistons
- 15m Quick connect steel braided hose
- Quick release mounting plate for optional hose reel
- Heavy duty powder coated steel frame



POWERED by HONDA



PART NO.	ENGINE
TM542-5000	GX690 24HP



### 3600PSI, 13HP PETROL HOT WATER PRESSURE WASHER

- Genuine Honda GX390 Engine
- Max Pressure: 3600PSI
- Flow Rate: 15 L/min
- Max Temp: 120°C
- Electric Start
- Commercial direct drive triplex pump
- Vertical dual pipe heating coils
- 33L Steel burner fuel tank
- Heavy duty powder coated steel frame



POWERED by HONDA



PART NO.	ENGINE
TM545-3600H	GX390 13HP



### 4000PSI, 12HP DIESEL PRESSURE WASHER

- Powerful 12HP air cooled diesel engine
- Max Pressure: 4000PSI
- Flow Rate: 17 L/min
- Electric / Recoil Start
- High quality triplex pump with ceramic coated stainless steel pistons
- 15m Quick connect steel braided hose
- Quick connect nozzles: 0°, 15°, 25°, 40°, Soap
- Heavy duty powder coated steel frame
- Large puncture proof solid treated wheels



PART NO.	ENGINE
TM543-4000	12HP Diesel



### 2700PSI, 25L/MIN PETROL VEHICLE MOUNTABLE PRESSURE WASHER

- Genuine Honda GX390 Engine
- Industrial grade, high flow triplex pump
- Max Pressure: 2700PSI
- Max Flow Rate: 25 L/min
- Belt driven design reduces RPM and vibration helping to extend pump life
- Ideal for mounting on Utes, Trucks and field service vehicles
- Hose and lance sold separately to suit installation requirements.



POWERED by HONDA



PART NO.	ENGINE
TM542-2700	GX390 13HP



### COMPACT AIR NEEDLE SCALER

- Low Vibration, Easy to Control: Built-in vibration damper keeps vibration at just 1.5 m/s<sup>2</sup>, providing smooth and comfortable operation without hand fatigue.
- Compact & Ultra-Lightweight, One-Handed Use: 250mm length and Weighs only 0.65 kg — compact, easy to handle, and perfect for long hours of use.
- Fast & Efficient Surface Cleaning: Delivers up to 6,000 impacts per minute for quick and effective rust or paint removal.
- 12 Steel Needles for Hard-to-Reach Areas: Equipped with 12x 2.0 mm precision needles to access tight spots and reduce surface damage during cleaning.
- Air Pressure: 90PSI / 6.3 bar
- Overall Length: 250mm
- Net Weight: 0.65kg
- Air Hose: 3/8"
- Vibration Level: 1.5m/s<sup>2</sup>
- Blow Per Minute (BPM): 6000
- Needle Diameter: 2mm x 100mm
- Piston Diameter: 11mm
- Stroke Length: 15mm
- Air Inlet: 1/4"



PART NO.	OVERALL LENGTH	AIR PRESSURE	BLOW PER MINUTE
M7-SN1350	250mm	90PSI / 6.3 bar	6000 BPM



### STRAIGHT AIR NEEDLE SCALER

- Vibration only 2.5 m/s<sup>2</sup>, built-in vibration-reducing damper (delivers smooth and comfortable operation).
- Lightweight at only 1.7 kg (medium-duty inline scaler with a compact tool body — ultralight and easy to use).
- 4,700 impacts/min capability (allows high working efficiency in surface removal operations).
- 19 pcs Ø3.0 mm steel needles (for reaching hard-to-access areas as well as reducing surface damage during the process).
- Air Pressure: 90PSI / 6.3 bar
- Overall Length: 363mm
- Net Weight: 3.74kg
- Air Hose: 3/8"
- Vibration Level: 2.5m/s<sup>2</sup>
- Blow Per Minute (BPM): 4700
- Needle Diameter: 3mm x 180mm
- Piston Diameter: 22mm
- Stroke Length: 23mm
- Air Inlet: 1/4"



PART NO.	OVERALL LENGTH	AIR PRESSURE	BLOW PER MINUTE
M7-SN1360	363mm	90PSI / 6.3 bar	4700 BPM



### PISTOL STYLE NEEDLE SCALER

- Only 6.7 m/s<sup>2</sup> vibration thanks to a built-in vibration-reducing damper — plus a cushion-grip pistol design for maximum comfort.
- Weighing just 2.6 kg, this medium-duty pistol scaler features a compact body that's ultralight and easy to use.
- 4,700 impacts per minute for outstanding surface removal efficiency.
- Equipped with 19 Ø3.0 mm steel needles to reach tight spaces while reducing surface damage.
- Quality-engineered to outperform industry standards.
- Air Pressure: 90PSI / 6.3 bar
- Overall Length: 250mm
- Net Weight: 5.73kg
- Air Hose: 3/8"
- Vibration Level: 6.7m/s<sup>2</sup>
- Blow Per Minute (BPM): 4700
- Needle Diameter: 3mm x 180mm
- Piston Diameter: 22mm
- Stroke Length: 23mm
- Air Inlet: 1/4"



PART NO.	OVERALL LENGTH	AIR PRESSURE	BLOW PER MINUTE
M7-SN1370	250mm	90PSI / 6.3 bar	4700 BPM



**100 PACK  
125MM NEEDLE SCALER  
NEEDLES**

- 3mm Diameter
- To suit M7 SN1288 Needle Scaler
- Suits most brands of needle scalers which require 3 x 125mm needle



PART NO.	LENGTH
M7A-SN93125	125MM



**100 PACK  
180MM NEEDLE SCALER  
NEEDLES**

- 3mm Diameter
- To suit M7 SN2110, M7 SN1368 & M7 SN1268 Needle Scaler
- Suits most brands of needle scalers which require 3 x 180mm needle



PART NO.	LENGTH	LIST PRICE
M7A-SN93180	180MM	\$150.00



**AIR BLOW GUN  
SIDE NOZZLE TYPE**

- Aluminium body
- Includes both a Side Hole Nozzle and also High Flow Nozzle
- Perfect for cleaning out narrow spaces from the side, such as cylindrical filters, car radiators, plant machinery and harvesting equipment
- 0 degree side hole
- Available in JC-116 (400mm), JC-122 (560mm), JC-140 (1016mm)



PART NO.	LENGTH
M7-JC116	400mm
M7-JC122	560mm
M7-JC140	1016mm



**IMPACT 3/8" DRIVE TO  
1/4" HEX ADAPTOR**

- Equipped with a 3/8" square drive, compatible with a wide range of electric, pneumatic, and manual tools.
- Connects to a 1/4" quick-release bit system, supporting 13 mm and 9.5 mm bits. The adjustable depth design allows flexible operation for various working conditions.
- Made of premium chrome-molybdenum (Cr-Mo) steel, offering excellent strength, toughness, and impact resistance, with an anti-rust surface



PART NO.	DRIVE	HEX
M7-ME372S08T	3/8"	1/4"



# Holemaker

Drilling Solutions By ITM®

## 3/8" CARBIDE BURRS 3 PIECE SET

- Ideal for use on mild steel, cast iron, high strength steel, steel castings, stainless steel, steel welds, titanium alloy and fibreglass composite
- 1/4" Imperial Shank
- Double cut geometry

**SET INCLUDES:**

- SA3 - 3/8" Head Cylindrical Square End
- SC3 - 3/8" Head Cylindrical Radius End
- SF3 - 3/8" Head Tree Shape Radius End



PART NO.	SET INCLUDES
CB-SET-33	SA3, SC3, SF3

# Holemaker

Drilling Solutions By ITM®

## 3/8" CARBIDE BURRS 4 PIECE SET

- Ideal for use on mild steel, cast iron, high strength steel, steel castings, stainless steel, steel welds, titanium alloy and fibreglass composite
- 1/4" Imperial Shank
- Double cut geometry

**SET INCLUDES:**

- SA3 - 3/8" Head Cylindrical Square End
- SC3 - 3/8" Head Cylindrical Radius End
- SF3 - 3/8" Head Tree Shape Radius End
- SL3 - 3/8" Head Tapered Radius End



PART NO.	SET INCLUDES
CB-SET-34	SA3, SC3, SF3, SL3



# TENGTTOOLS®

## 1133PCE PRO35 53" 19 DRAWER MONSTER TOOL KIT METRIC RED

- 1133-piece 53" 'Monster' tool kit totaling 19 fully extendable drawers for ample storage, crafted for automotive and heavy-duty vehicle professionals
- The storage consists of a roller cabinet and a tool chest made of powder-coated heavy-duty steel treated with a 5-step phosphate-free rust prevention process
- Covers a wide range of tools, all organized in precision cut high-density EVA foam modules for easy identification of tools
- Features robust 6" swivel castors for mobility, a comfort-grip handle, and accessory holes for added functionality
- Part of the TengTools Tool Control System



PART NO.	COLOUR
TE-TKS53R1133F	RED

# TENGTTOOLS®

## 1/2" TORQUE WRENCH & BREAKER BAR SET

- This set includes the 1292AG-EP 1/2" drive torque wrench and the 1201 1/2" drive breaker bar, each tailored for specific tasks
- The 1292AG-EP torque wrench is engineered for precise fastener tightening, offering an adjustable torque range from 40 to 210 Nm.
- It incorporates a click mechanism that signals when the desired torque is reached, along with an angular gauge for post-tightening accuracy
- The tool is marked with dual scales in Nm and ft/lb, and has a locking feature to maintain settings during use
- The wrench is designed with a reversible 24 teeth ratchet mechanism for clockwise tightening, adhering to DIN3122 standards and achieving an accuracy within ±4% which is in line with ISO6789 standards
- The torque wrench is supplied with its individual certification number to ensure reliable readings
- The 1201 breaker bar complements the torque wrench with its durable chrome vanadium construction and satin finish for enhanced grip. It features a ball detent retainer for secure socket attachment and an ergonomically designed handle for comfortable use in various conditions.



PART NO.	SET INCLUDES
TE-TTX2493	TE-1292AG-EP & TE-1201



## CERAMIC HONING ROD KNIFE SHARPENER

The Ceramic Honing Rod gently refines your knife's edge, removing just enough material to restore sharpness without over-grinding. It's a clear upgrade from traditional steel rods - offering better performance and longer edge life. Built-in 20° angle guides keep your strokes consistent, and the 9" ceramic surface works across all your kitchen knives. A smarter way to maintain sharp edges between full sharpenings.

- Fine grit ceramic rod quickly restores a sharp edge with a 9" honing surface and a safety-tipped design for safer handling.
- Built-in 20° angle guides keep every stroke on target for easy, consistent edge maintenance.
- Ergonomic grip and slim profile fit comfortably in hand and tuck neatly into a standard kitchen knife block.



PART NO.	EDGE ANGLES	LENGTH
WSKTNCHR-I	20°	9"



## PROFESSIONAL PRECISION ADJUST™ ELITE KNIFE SHARPENER

- Professional-level sharpener with metal construction
- Includes ten (10) abrasive grits: 220, 320, 400, 600, 800 diamond, Fine Ceramic, 1200, 2000 & 3000 grit resin bonded diamond plates & Premium Leather Strop
- Adjustable Angle from 15-30 degrees with included digital angle indicator.
- Small knife table attachment allows sharpening small "pen knives" to angles as low as 15°
- Rigid Carry Case with Foam Inserts for organization
- Abrasives are user replaceable
- Sharpens Kitchen Knives, Pocket Knives, Hunting Knives, and Outdoor Knives.
- 3 Year Warranty



SCAN HERE TO WATCH VIDEO

PART NO.	DESCRIPTION
WSBCHPAJ-PRO-ELT	Professional Precision Adjust™ Elite Knife Sharpener



## WARRANTY TERMS

In addition to any warranties or conditions implied by applicable statutes or regulations, Industrial Tool & Machinery Sales warrants all of its products against defective workmanship and faulty materials for a period of twelve (12) months from the date of purchase, unless otherwise stated. At our option we will repair or replace, free of charge, any item on the condition that:

- The return has been authorised by ITM, and a return authority number (RA) has been issued prior to goods being despatched.
- The complete machine or tool is returned, freight prepaid to ITM or one of its authorised service agents as directed by ITM, and is found to have a material or constructional defect.
- The machine or tool has not been subject to misuse, neglect or damage by accident.
- The fault is not a result of normal "wear and tear".
- Written permission has been received from ITM prior to the commencement of repair.
- Repairs, tampering or modification carried out by unauthorised personnel will void all warranty.
- Consumable items such as cutting tools, pilot pins, saw blades, grinding wheels etc. are NOT covered by the warranty.

Our goods come with guarantees which cannot be excluded under the Australian Consumer Law. You are entitled to replacement or refund for a major failure and to compensation for other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

## TERMS OF SALE

- Prices & Specifications are subject to change without notice.
- All prices within this ITM catalogue Do Not Include GST, which will be shown separately on Tax Invoices as per ATO requirements.
- Recommended Retail Prices are shown only for guidance of distributors.
- Trading Terms are strictly 30 days to established accounts only.
- Title does not pass on goods invoiced until payment is made in full.
- Claims will not be recognised after 7 days from delivery of goods. Returns must be first authorised by our office, freight pre-paid, showing documents with the original invoice number. Returns are subject to 10% re-stocking fee unless prior arrangements have been made. Returns will only be accepted if goods are received in an unused and resalable condition.

## FREIGHT

Freight subsidies & F.I.S. deliveries depend on product, invoice value, delivery area and can be negotiated at the time of order.



**Australia's Leading Wholesale Distributor**  
Of Professional Quality Tool Brands, Since 1992

## NATIONAL SALES & DISTRIBUTION LOCATIONS



11 EASTERN SERVICE ROAD  
STAPYLTON QLD 4207 AUSTRALIA  
Phone 07 3287 1114  
sales@itmtools.com.au

[www.itmtools.com.au](http://www.itmtools.com.au)